

# Exquisite

PRODUCT CATALOGUE 2024

**20**  
YEAR  
ANNIVERSARY



**NEW  
EXTENDED  
WARRANTY!**



for selected models





# Company Overview

---

Exquisite Marketing Australia Pty. Ltd. was established in 2004 as an importer and distributor of commercial refrigeration products. At Exquisite Marketing Australia we have a strong team environment and provide all our clients with a reliable and highly valued service.

Since the start of our business, our company has grown each year, thanks to support from our customers for our quality products and services. We now have a commercial refrigeration range that fit whole commercial kitchen needs, display refrigeration for your store, medical refrigeration range as well as other refrigeration products.

Our objective is to provide our clients with high quality equipment that performs exceptionally well in diverse climate supported by reliable service network throughout the Australia. Exquisite Marketing Australia pride ourselves on providing trustworthy services, delivered by our dedicated staff who have the experience and skills to advise you on all your refrigeration requirements.

Along with our company commitment towards environmentally friendly and sustainable direction, we introduced new gas on our product range. We are using R290 and R600a gas, ozone friendly with better thermodynamic qualities that translates into lower energy consumption for lower running cost. We have converted most of our product range with new gas in support to more sustainable future to our planet.

# Exquisite



Exquisite Marketing Australia Pty. Ltd.  
Unit 5, 6 Garden Road  
Clayton VIC 3168 Australia

**P** +61 3 9561 1595, 9561 1695  
**F** +61 3 9561 1690  
**E** [sales@exquisiteaust.com.au](mailto:sales@exquisiteaust.com.au)  
**W** [www.exquisiteaust.com.au](http://www.exquisiteaust.com.au)

# Contents

## Commercial Kitchen



|   |       |
|---|-------|
| Underbench storage refrigerators and freezers | 5-13  |
| Upright storage refrigerators and freezers    | 14-18 |
| Food preparation refrigerators                | 19-20 |
| Counter top food preparation refrigerators    | 21    |
| Storage chest freezers - stainless steel top  | 22    |

## Display Cabinets



|  |       |
|--|-------|
| Counter top display refrigerators      | 25    |
| Upright display refrigerators          | 26-31 |
| Supermarket display refrigerators      | 32    |
| Backbar display refrigerators          | 33-37 |
| Cake display refrigerators             | 38-41 |
| Counter top cake display refrigerators | 42-43 |
| Ambient cake display                   | 44-45 |

## Display Freezers



|                               |    |
|-------------------------------|----|
| Curved glass display freezers | 47 |
| Flat glass display freezers   | 48 |
| Ice cream scooping freezers   | 49 |
| Gelato freezer                | 50 |
| Supermarket Island freezers   | 51 |

## Vaccine Refrigerators



|                       |       |
|-----------------------|-------|
| Vaccine refrigerators | 53-54 |
|-----------------------|-------|



# Commercial Kitchen







# Underbench Storage Refrigerators with Solid Door

## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## USC260H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 314 L

**Exterior dimensions in mm:** 1360w x 700d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 119/102 kg

**Energy consumption in 24h:** 2.2 kWh

**\$3,800.00+GST**

## USC400H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 465 L

**Exterior dimensions in mm:** 1795w x 700d x 830h

**Number of adjustable shelves:** 3



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 140/121 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,400.00+GST**

## USC550H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 616 L

**Exterior dimensions in mm:** 2230w x 700d x 830h

**Number of adjustable shelves:** 4

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 170/150 kg

**Energy consumption in 24h:** 4.7 kWh

**\$5,200.00+GST**



# Underbench Storage Refrigerators with Solid Door - Slimline

## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## SSC260H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 260 L

**Exterior dimensions in mm:** 1360w x 600d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 92/83 kg

**Energy consumption in 24h:** 2.2 kWh

**\$3,700.00+GST**

## SSC400H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 386 L

**Exterior dimensions in mm:** 1795w x 600d x 830h

**Number of adjustable shelves:** 3



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 130/105 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,300.00+GST**

## SSC550H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 511 L

**Exterior dimensions in mm:** 2230w x 600d x 830h

**Number of adjustable shelves:** 4

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 156/121 kg

**Energy consumption in 24h:** 4.7 kWh

**\$5,200.00+GST**

# Underbench Storage Refrigerators with Glass Door

## Features:



- Self closing glass doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Continuous shelf for maximum use of space
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## USC260G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 314 L

**Exterior dimensions in mm:** 1360w x 700d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 125/108 kg

**Energy consumption in 24h:** 2.2 kWh

**\$3,900.00+GST**

## USC400G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 465 L

**Exterior dimensions in mm:** 1795w x 700d x 830h

**Number of adjustable shelves:** 3



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 153/134 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,600.00+GST**

## USC550G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 616 L

**Exterior dimensions in mm:** 2230w x 700d x 830h

**Number of adjustable shelves:** 4

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 177/158 kg

**Energy consumption in 24h:** 4.7 kWh

**\$5,400.00+GST**

# Underbench Storage Refrigerators with Glass Door - Slimline

## Features:

- Self closing glass doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Continuous shelf for maximum use of space
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V



- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## SSC260G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 260 L

**Exterior dimensions in mm:** 1360w x 600d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 120/103 kg

**Energy consumption in 24h:** 2.2 kWh

**\$3,800.00+GST**

## SSC400G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 386 L

**Exterior dimensions in mm:** 1795w x 600d x 830h

**Number of adjustable shelves:** 3



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 148/129 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,600.00+GST**

## SSC550G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 511 L

**Exterior dimensions in mm:** 2230w x 600d x 830h

**Number of adjustable shelves:** 4

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 172/153 kg

**Energy consumption in 24h:** 4.7 kWh

**\$5,400.00+GST**



# Underbench Storage Freezers with Solid Door



## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V

- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## USF260H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 314 L

**Exterior dimensions in mm:** 1360w x 700d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 124/107 kg

**Energy consumption in 24h:** 7.8 kWh

**\$4,700.00+GST**

## USF400H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 465 L

**Exterior dimensions in mm:** 1795w x 700d x 830h

**Number of adjustable shelves:** 3

**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 165/146 kg

**Energy consumption in 24h:** 8.2 kWh

**\$5,500.00+GST**

# Underbench Storage Freezers with Solid Door - Slimline



## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V

- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## SSF260H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 260 L

**Exterior dimensions in mm:** 1360w x 600d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 124/107 kg

**Energy consumption in 24h:** 7.8 kWh

**\$4,600.00+GST**

## SSF400H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 386 L

**Exterior dimensions in mm:** 1795w x 600d x 830h

**Number of adjustable shelves:** 3

**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 165/146 kg

**Energy consumption in 24h:** 9.2 kWh

**\$5,400.00+GST**



# Single Door Underbench Storage Refrigerators


## Features:

- Lockable door with handles
- Static cooling system with manual defrosting
- Adjustable feet with roller at the back
- Frequency/voltage: 50Hz/220-240 V

- Digital controller and digital temperature display
- Plastic coated steel shelves
- Refrigerant: R600a
- Insulation thickness: 45 mm



## MC210H

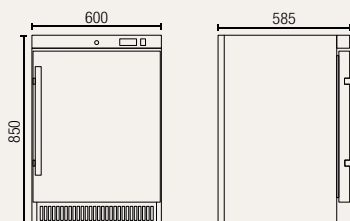

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 130 L

**Exterior dimensions in mm:** 600w x 585d x 850h

**Number of adjustable shelves:** 3

**Energy consumption in 24h:** 0.94 kWh

**Temperature set range:** -2°C to +10°C


**Gross/net weight:** 49/41 kg

**Door material:** stainless steel

**Ambient temperatures:** 30°C

**\$1,400.00+GST**

## MC210G



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 136 L

**Exterior dimensions in mm:** 600w x 585d x 850h

**Number of adjustable shelves:** 3

**Energy consumption in 24h:** 1.82 kWh

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 52/44 kg

**Door material:** glass

**Ambient temperatures:** 25°C

**\$1,600.00+GST**

# Single Door Underbench Storage Freezers


## Features:

- Lockable door with handles
- Static cooling system with manual defrosting
- Adjustable feet with roller at the back
- Frequency/voltage: 50Hz/220-240 V

- Digital controller and digital temperature display
- Plastic coated steel shelves
- Refrigerant: R290
- Insulation thickness: 59 mm



## MF210H

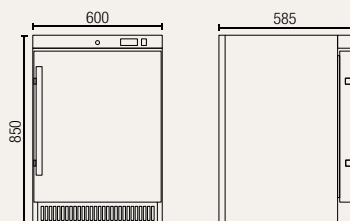

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 108 L

**Exterior dimensions in mm:** 600w x 585d x 850h

**Number of shelves:** 3

**Energy consumption in 24h:** 1.22 kWh

**Temperature set range:** -18°C to -25°C


**Gross/net weight:** 52/44 kg

**Door material:** stainless steel

**Ambient temperatures:** 30°C

**\$1,500.00+GST**

## MF210G



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 114 L

**Exterior dimensions in mm:** 600w x 585d x 850h

**Number of shelves:** 3

**Energy consumption in 24h:** 2.14 kWh

**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 58/50 kg

**Door material:** glass

**Ambient temperatures:** 25°C

**\$1,700.00+GST**



# Single Door Underbench Storage Refrigerators

## Features:


- Lockable door with handles
- Digital controller and digital temperature display
- Adjustable feet
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Refrigerant: R134a
- Ambient temperatures +16°C to +32°C



## MC200H



**RUN OUT  
MODEL**  
Limited Stock

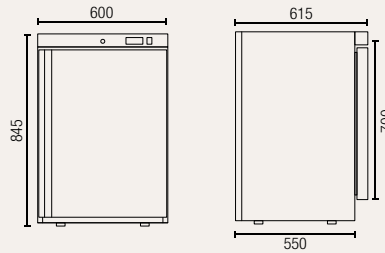

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 140 L

**Exterior dimensions in mm:** 600w x 615d x 845h

**Number of adjustable shelves:** 3

**Cooling system:** static, fan assisted

**Defrost system:** manual

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 55/45 kg

**Door material:** stainless steel


**Energy consumption in 24h:** 2 kWh

**\$1,800.00+GST**

## MC200G



**RUN OUT  
MODEL**  
Limited Stock

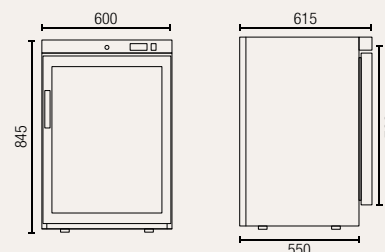

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 140 L

**Exterior dimensions in mm:** 600w x 615d x 845h

**Number of adjustable shelves:** 3

**Cooling system:** static, fan assisted

**Defrost system:** manual

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 55/45 kg

**Door material:** glass

**Energy consumption in 24h:** 2 kWh

**\$1,900.00+GST**


# Upright Storage Refrigerators with Solid Door

## Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



## GSC650H

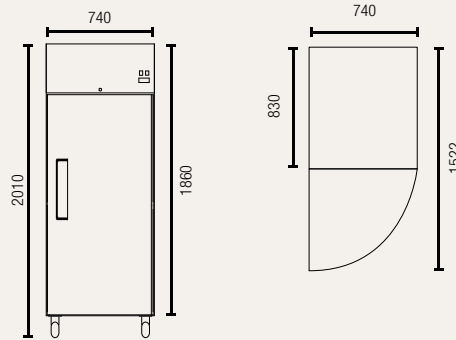

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 685 L

**Exterior dimensions in mm:** 740w x 830d x 2010h

**Number of adjustable shelves:** 3


**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 136/121 kg

**Energy consumption in 24h:** 2.78 kWh

**\$3,900.00+GST**

## GSC1410H

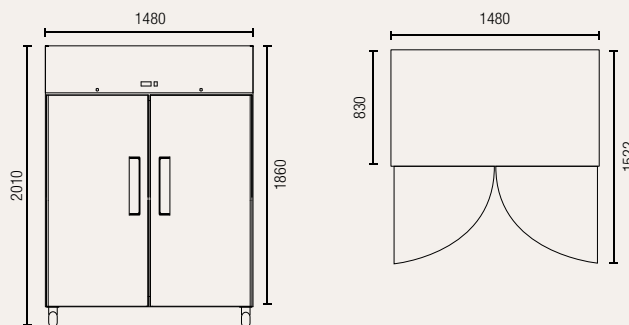

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 1476 L

**Exterior dimensions in mm:** 1480w x 830d x 2010h

**Number of adjustable shelves:** 6

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 213/188 kg

**Energy consumption in 24h:** 4.15 kWh

**\$6,000.00+GST**




# Upright Storage Refrigerators with Split Solid Door

## Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



## GSC652H

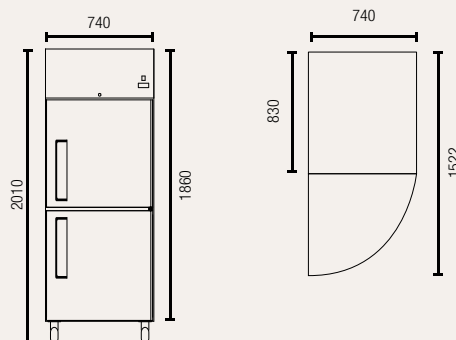

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 685 L

**Exterior dimensions in mm:** 740w x 830d x 2010h

**Number of adjustable shelves:** 3


**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 136/121 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,000.00+GST**

## GSC1412H

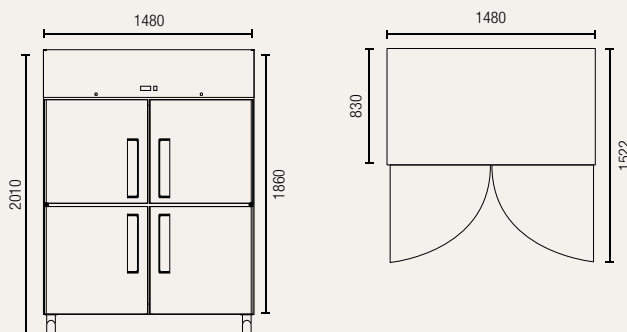

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 1476 L

**Exterior dimensions in mm:** 1480w x 830d x 2010h

**Number of adjustable shelves:** 6

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 213/188 kg

**Energy consumption in 24h:** 4.3 kWh

**\$6,100.00+GST**

# Upright Storage Refrigerators with Glass Door


## Features:

- Lockable self closing glass doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronom pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V

- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



## GSC650G

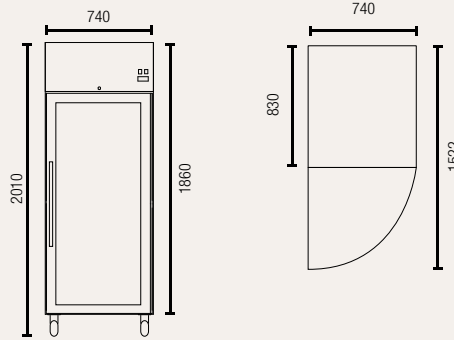

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 685 L

**Exterior dimensions in mm:** 740w x 830d x 2010h

**Number of adjustable shelves:** 3

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 147/132 kg


**Energy consumption in 24h:** 3.1 kWh

**\$4,100.00+GST**

## GSC1410G



Bridge between shelves for maximum use of space

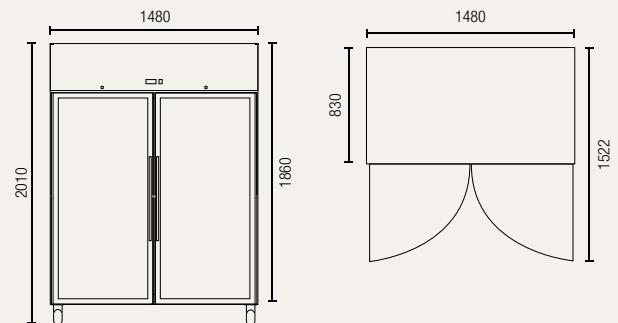

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 1476 L

**Exterior dimensions in mm:** 1480w x 830d x 2010h

**Number of adjustable shelves:** 6

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 233/208 kg

**Energy consumption in 24h:** 4.3 kWh

**\$6,200.00+GST**


# Upright Storage Freezers with Solid Door

## Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



## GSF650H

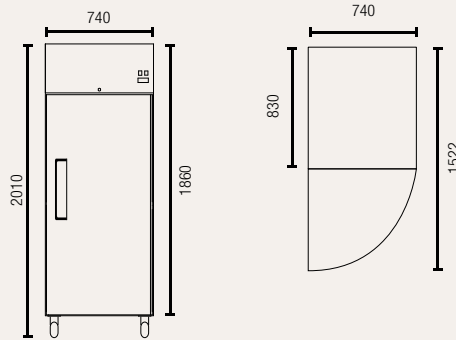

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 685 L

**Exterior dimensions in mm:** 740w x 830d x 2010h

**Number of adjustable shelves:** 3


**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 141/126 kg

**Energy consumption in 24h:** 6.44 kWh

**\$4,500.00+GST**

## GSF1410H

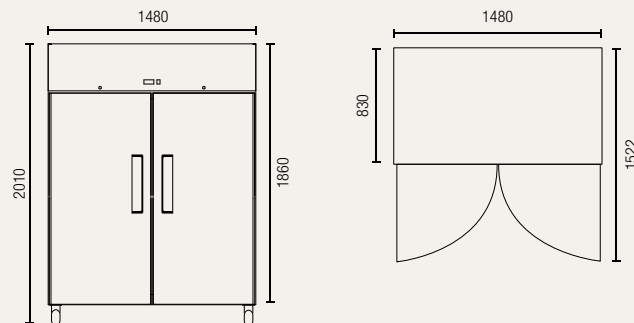

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 1476 L

**Exterior dimensions in mm:** 1480w x 830d x 2010h

**Number of adjustable shelves:** 6

**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 226/201 kg

**Energy consumption in 24h:** 10 kWh

**\$6,700.00+GST**



# Upright Storage Freezers with Split Solid Door


## Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V

- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



## GSF652H

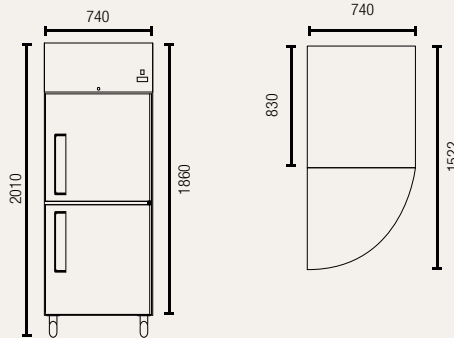

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 685 L

**Exterior dimensions in mm:** 740w x 830d x 2010h

**Number of adjustable shelves:** 3


**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 141/126 kg

**Energy consumption in 24h:** 6.7 kWh

**\$4,700.00+GST**

## GSF1412H

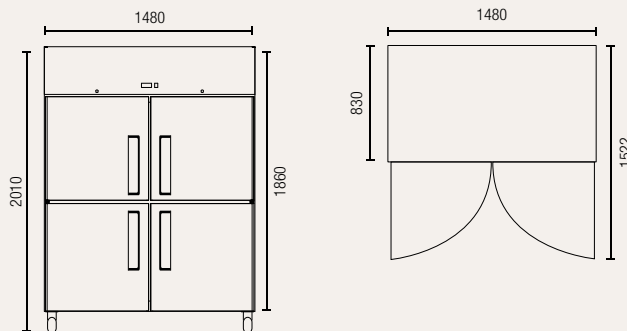

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 1476 L

**Exterior dimensions in mm:** 1480w x 830d x 2010h

**Number of adjustable shelves:** 6

**Temperature set range:** -18°C to -22°C

**Gross/net weight:** 226/201 kg

**Energy consumption in 24h:** 10.5 kWh

**\$6,800.00+GST**

## Food Preparation Refrigerators

### Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Under bench shelf to fit gastronorm pan size GN1/1
- Frequency/voltage: 50Hz/220-240 V

- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C




## MTC263H



\* catering tubs and tub-lids not included



Allow min. 100mm clearance for instalation,  
all vents must be left clear

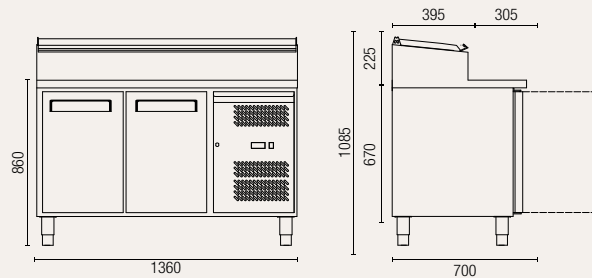

**Gross volume:** 282 L

**Exterior dimensions in mm:** 1360w x 700d x 1085h

**Number of adjustable shelves:** 2

**Gastronorm pan size (top):** 7 x GN1/3

**Temperature set range:** +2°C to +8°C

**Gross/net weight:** 131/104 kg

**Preparation area material:** stainless steel

**Energy consumption in 24h:** 3.4 kWh

**\$5,900.00+GST**


## MTC363H



\* catering tubs and tub-lids not included



Allow min. 100mm clearance for instalation,  
all vents must be left clear

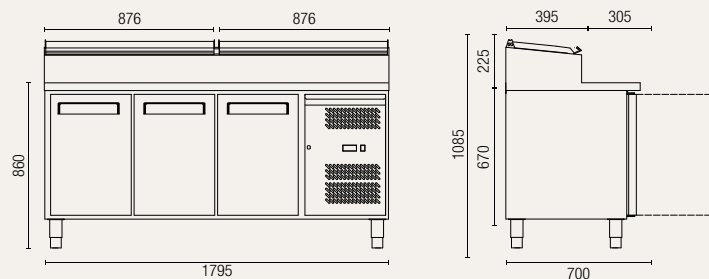

**Gross volume:** 417 L

**Exterior dimensions in mm:** 1795w x 700d x 1085h

**Number of adjustable shelves:** 3

**Gastronorm pan size (top):** 8 x GN1/3

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 161/130 kg

**Preparation area material:** stainless steel

**Energy consumption in 24h:** 4.35 kWh

**\$6,100.00+GST**

# Food Preparation Refrigerators

## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior


- Plastic coated steel shelves
- Refrigerant: R290
- Castor wheels
- Ambient temperatures from +16°C to +38°C



## ICC260H



Plastic catering tubs included

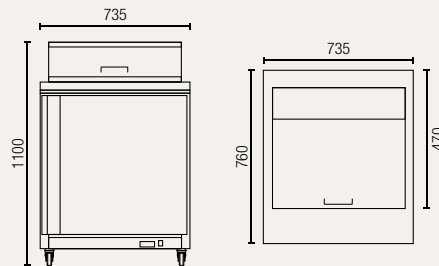

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 251 L

**Exterior dimensions in mm:** 735w x 760d x 1100h

**Number of adjustable shelves:** 1

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 116/85 kg


**Gastronorm pan size (top):** 8 x GN1/6

**\$3,900.00+GST**

## ICC400H



Plastic catering tubs included

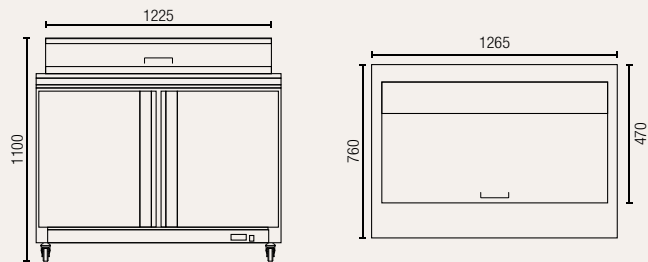

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 406 L

**Exterior dimensions in mm:** 1265w x 760d x 1100h

**Number of adjustable shelves:** 2

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 179/123 kg


**Gastronorm pan size (top):** 12 x GN1/6

**\$6,100.00+GST**

## ICC550H



Plastic catering tubs included

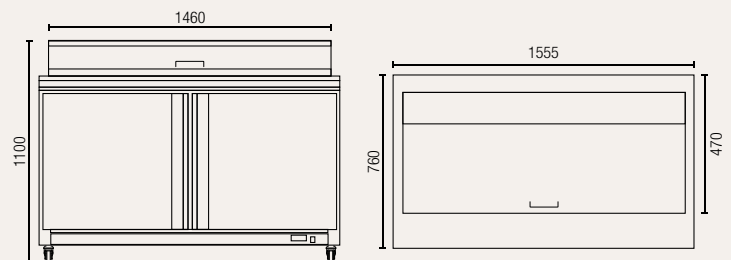

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 527 L

**Exterior dimensions in mm:** 1555w x 760d x 1100h

**Number of adjustable shelves:** 2

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 205/145 kg

**Gastronorm pan size (top):** 16 x GN1/6

**\$6,600.00+GST**



# Counter Top Food Preparation Refrigerators

## Features:

- Dynamic fan forced cooling system with automatic defrosting
- Digital controller and digital temperature display
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel and glass top cabinet finish
- To fit 150mm high GN pans
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



## ICT1200



\* catering tubs and tub-lids not included

**Exterior dimensions in mm:** 1200w x 395d x 450h

**Gross/net weight:** 60/40.5 kg


**Number of GN pans:** 3 x GN1/3 + 1 x GN1/2

**Temperature set range:** +2°C to +10°C

**Energy consumption in 24h:** 1.12 kWh

**\$1,400.00+GST**

## ICT1500

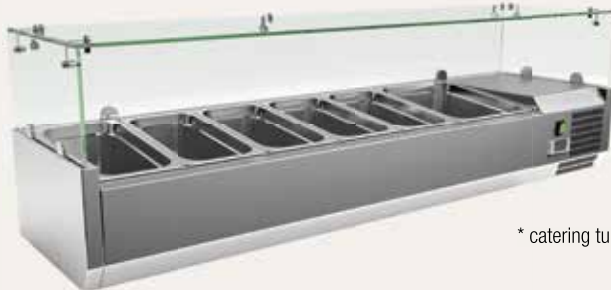

\* catering tubs and tub-lids not included

**Exterior dimensions in mm:** 1500w x 395d x 450h

**Gross/net weight:** 72/48 kg

**Number of GN pans:** 5 x GN1/3 + 1 x GN1/2

**Temperature set range:** +2°C to +10°C

**Energy consumption in 24h:** 1.2 kWh

**\$1,600.00+GST**

## ICT1800



\* catering tubs and tub-lids not included

**Exterior dimensions in mm:** 1800w x 395d x 450h

**Gross/net weight:** 76/50.5 kg

**Number of GN pans:** 8 x GN1/3

**Temperature set range:** +2°C to +10°C

**Energy consumption in 24h:** 1.25 kWh

**\$1,700.00+GST**

# Storage Chest Freezers - Stainless Steel Top



## Features:

- White painted steel body with stainless steel lid
- Aluminium liner material
- Static cooling system with manual defrosting
- Door handle with lock
- Plastic coated steel baskets
- Frequency/voltage: 50Hz/220-240 V

- 72mm thick insulation
- Castor wheels
- Internal light
- Refrigerant: R290
- Ambient temperatures +35°C



## ESS560H



**Gross volume:** 488 L

**Exterior dimensions in mm:** 1655w x 740d x 850h

**Number of baskets:** 5




**Temperature set range:** ≤-18°C

**Gross/net weight:** 87/72 kg

**Energy consumption in 24h:** 3.1 kWh

**\$2,200.00+GST**

## ESS660H

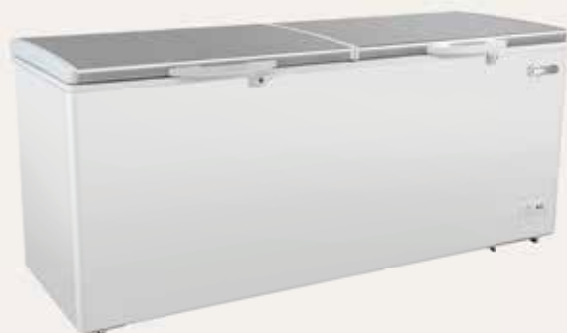

**Gross volume:** 561 L

**Exterior dimensions in mm:** 1930w x 710d x 825h

**Number of baskets:** 6



**Temperature set range:** ≤-18°C

**Gross/net weight:** 95/75 kg

**Energy consumption in 24h:** 3.6 kWh

**\$2,400.00+GST**

## ESS760H



**Gross volume:** 662 L

**Exterior dimensions in mm:** 1945w x 797d x 825h

**Number of baskets:** 6

**Temperature set range:** ≤-18°C

**Gross/net weight:** 98/78 kg

**Energy consumption in 24h:** 3.7 kWh

**\$2,600.00+GST**







# Display Cabinets





# Counter Top Display Refrigerators

## Features:

- Double curved glass door (front and back) for easy stock rotation
- Lockable doors with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Frequency/voltage: 50Hz/220-240 V
- Available in black or white
- Shelf material: chrome coated steel
- Internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C





## CTD78



available in  
Black or  
White



Double lockable curved doors



**Gross volume:** 86 L

**Exterior dimensions in mm:** 425w x 429d x 978h

**Number of adjustable shelves:** 3

**Temperature set range:** +2°C to +12°C

**Gross/net weight:** 39/36.5 kg

**Energy consumption in 24h:** 1.9kWh

**\$1,300.00+GST**



## CTD78LED



available in  
Black or  
White



Double lockable curved doors



**Gross volume:** 86 L

**Exterior dimensions in mm:** 425w x 429d x 978h

**Number of adjustable shelves:** 3

**LED strip on corners:** yes

**Temperature set range:** +2°C to +12°C

**Gross/net weight:** 39/36.5 kg

**Energy consumption in 24h:** 1.9kWh

**\$1,400.00+GST**


# Upright Display Refrigerators

**Features:**

- Double glazed curved glass door with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Internal LED lights on corners
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- Removable top light box
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +32°C



## CTD235 Black

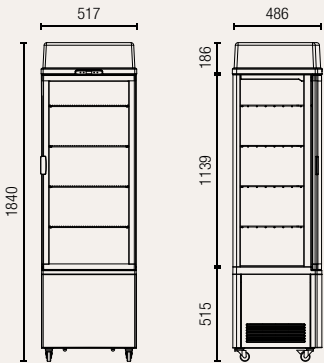


**Gross volume:** 235 L  
**Exterior dimensions in mm:** 517w x 486d x 1840h  
**Number of adjustable shelves:** 4

**Temperature set range:** +2°C to +12°C  
**Gross/net weight:** 80.5/76.4 kg  
**Energy consumption in 24h:** 5.46 kWh

**\$2,800.00+GST**

## CTD235 White

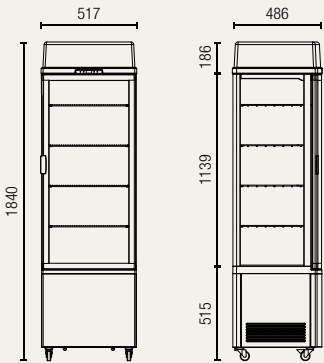

**Gross volume:** 235 L  
**Exterior dimensions in mm:** 517w x 486d x 1840h  
**Number of adjustable shelves:** 4

**Temperature set range:** +2°C to +12°C  
**Gross/net weight:** 80.5/76.4 kg  
**Energy consumption in 24h:** 5.46 kWh

**\$2,800.00+GST**



# Upright Display Refrigerators

## Features:

- 4 sided glass for maximum display area
- Dynamic fan forced cooling system with automatic defrosting
- Digital controller and digital temperature display
- Frequency/voltage: 50Hz/220-240 V



- Lockable door
- Shelf material: plastic coated steel
- Refrigerant: R290
- Ambient temperatures from +16°C to +30°C



**CTD280**



**RUN OUT  
MODEL**  
Limited Stock

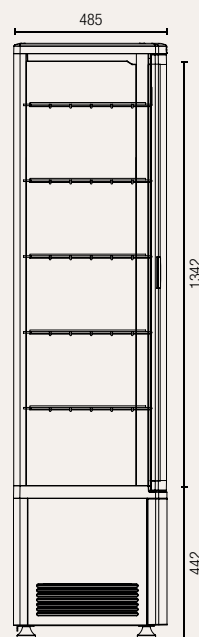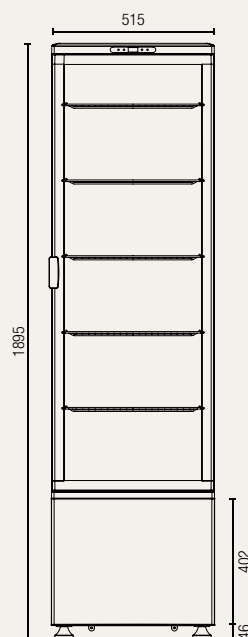

**Gross volume:** 280 L

**Exterior dimensions in mm:** 515w x 485d x 1895h

**Number of adjustable shelves:** 4

**Temperature set range:** +2°C to +12°C

**Gross/net weight:** 89/94.1 kg

**Energy consumption in 24h:** 3.28kWh

**\$2,600.00+GST**

# Upright Display Refrigerators

**Features:**


- Lockable double glazed doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V
- White steel external and internal finish
- LED internal light
- Castor wheels
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



**DC400P**



available in  
Black or  
White

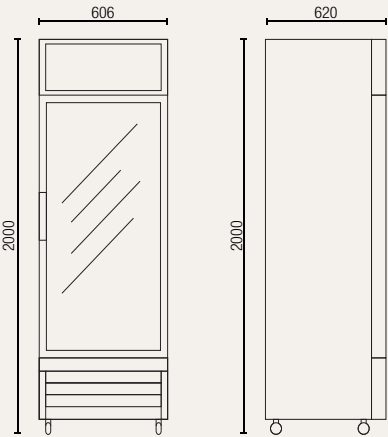

**Gross volume:** 400 L  
**Exterior dimensions in mm:** 606w x 620d x 2000h  
**Number of adjustable shelves:** 4

**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 98/83 kg  
**Energy consumption in 24h:** 4 kWh

**\$2,200.00+GST**

# Upright Display Refrigerators

## Features:

- Double glazed doors with LowE
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V


- Prepainted steel external and internal finish
- LED internal light (2 sides + top)
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



## DC1000P



available in  
Black or  
White

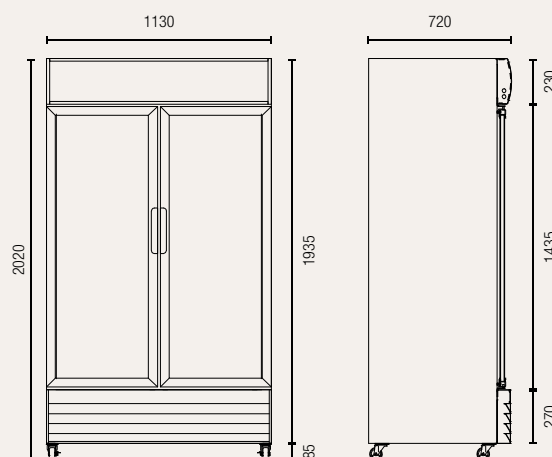

**Gross volume:** 1000 L

**Exterior dimensions in mm:** 1130w x 720d x 2020h

**Number of adjustable shelves:** 8

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 175/155 kg

**Energy consumption in 24h:** 5.6 kWh

**\$4,000.00+GST**

# Upright Display Refrigerators



**Features:**

- Double glazed doors with LowE
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V

- Prepainted steel external and internal finish
- LED internal light (2 sides + top)
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



## DC700

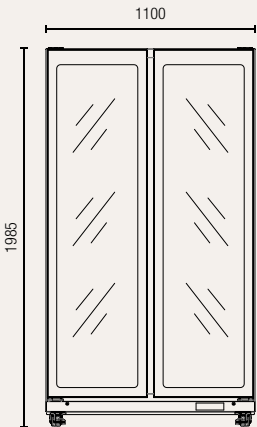

**Gross volume:** 710 L

**Exterior dimensions in mm:** 1100w x 600d x 1985h

**Number of adjustable shelves:** 10

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 195/160 kg

**Energy consumption in 24h:** 4.1 kWh

**\$3,000.00+GST**



# Upright Display Refrigerators


## Features:

- Double glazed doors with LowE
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V



- Prepainted steel external and internal finish
- LED internal light (2 sides + top)
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



## DC1100

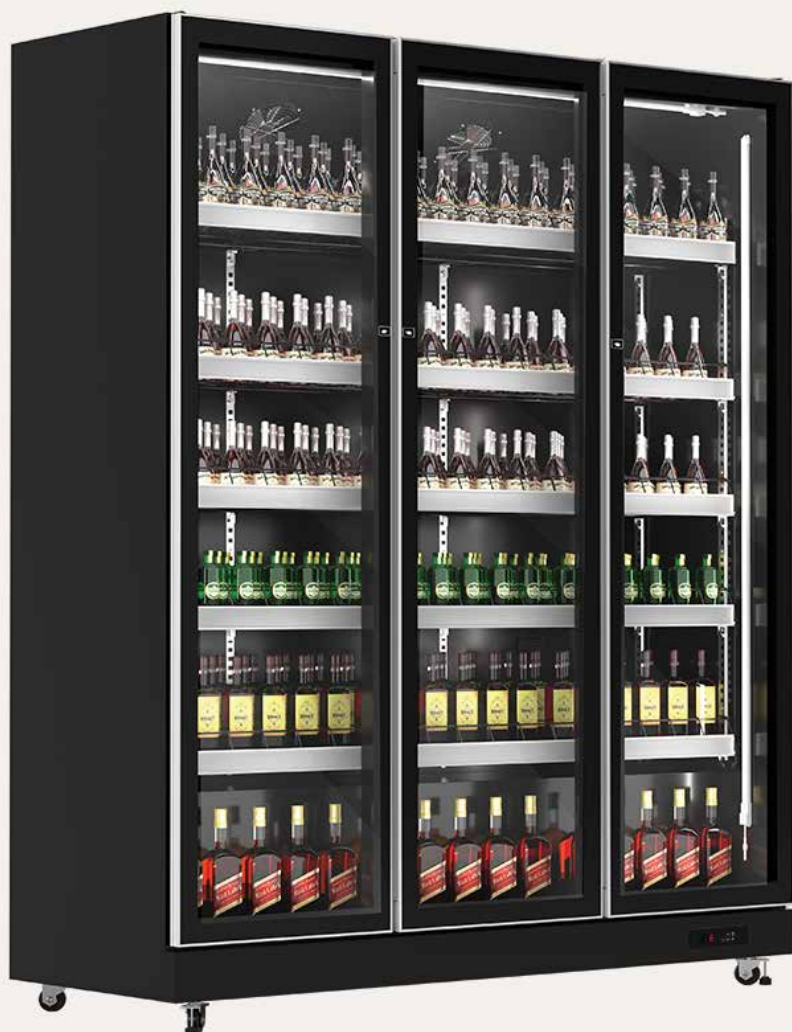

**NEW  
PRODUCT**

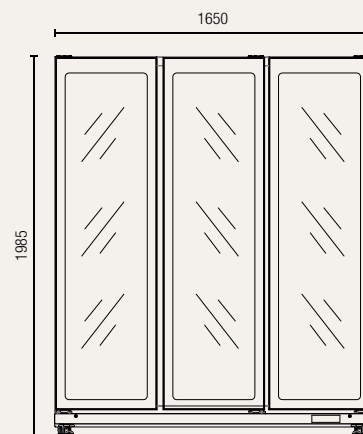

**Gross volume:** 1100 L

**Exterior dimensions in mm:** 1650w x 600d x 1985h

**Number of adjustable shelves:** 15

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 230/220 kg

**Energy consumption in 24h:** 5.4 kWh

**\$4,500.00+GST**



# Supermarket Display Chillers

## Features:

- Low E tempered glass door with integrated handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- LED internal light
- Frequency/voltage: 50Hz/220 V
- Powder coated steel cabinet finish
- Plastic coated steel shelves
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +18°C to +38°C



## SMC1600

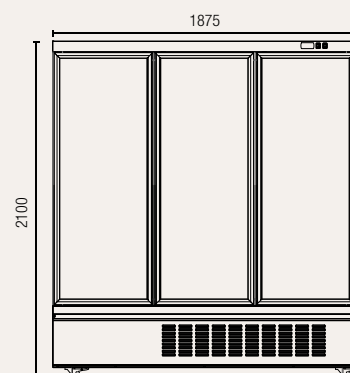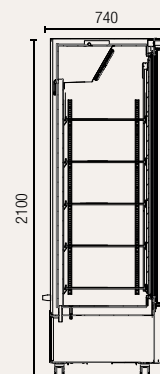

**Gross volume:** 1665 L

**Exterior dimensions in mm:** 1875w x 740d x 2100h

**Number of adjustable shelves:** 15

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 284/245 kg

**Energy consumption in 24h:** 8.28 kWh

**\$7,400.00+GST**



# Backbar Display Refrigerators - Swing Door

## Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



## UBC210



**Gross volume:** 219 L

**Exterior dimensions in mm:** 900w x 530d x 895h

**Number of adjustable shelves:** 4



**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 65/59 kg

**Energy consumption in 24h:** 1.8 kWh

**\$1,750.00+GST**

## UBC330



**Gross volume:** 339 L

**Exterior dimensions in mm:** 1350w x 530d x 895h

**Number of adjustable shelves:** 6

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 84/80 kg

**Energy consumption in 24h:** 2.1 kWh

**\$2,300.00+GST**

# Backbar Display Refrigerators - Swing Door

**Features:**



- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



## UBC210L



LOWER  
HEIGHT



**Gross volume:** 199 L  
**Exterior dimensions in mm:** 900w x 530d x 835h  
**Number of adjustable shelves:** 4



**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 61/57 kg  
**Energy consumption in 24h:** 1.8 kWh

**\$1,750.00+GST**

## UBC330L



LOWER  
HEIGHT



**Gross volume:** 308 L  
**Exterior dimensions in mm:** 1350w x 530d x 835h  
**Number of adjustable shelves:** 6

**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 82/78 kg  
**Energy consumption in 24h:** 2.1 kWh

**\$2,300.00+GST**




# Backbar Display Refrigerators - Sliding Door

## Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



## UBC210S

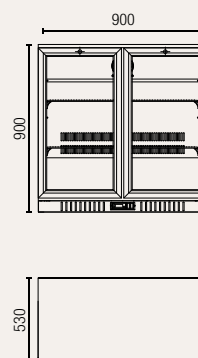

**Gross volume:** 208 L

**Exterior dimensions in mm:** 900w x 530d x 900h

**Number of adjustable shelves:** 4


**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 72/62 kg

**Energy consumption in 24h:** 1.9 kWh

**\$1,750.00+GST**

## UBC330S

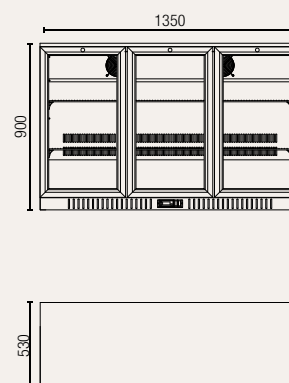

**Gross volume:** 330 L

**Exterior dimensions in mm:** 1350w x 530d x 900h

**Number of adjustable shelves:** 6

**Temperature set range:** 0°C to +10°C

**Gross/net weight:** 90/80 kg

**Energy consumption in 24h:** 2.5 kWh

**\$2,300.00+GST**

# Backbar Display Refrigerators - Sliding Door

**Features:**


- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



## UBC210SL



LOWER  
HEIGHT



**Gross volume:** 199 L  
**Exterior dimensions in mm:** 900w x 530d x 835h  
**Number of adjustable shelves:** 4


**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 61/57 kg  
**Energy consumption in 24h:** 1.8 kWh

**\$1,750.00+GST**

## UBC330SL



LOWER  
HEIGHT



**Gross volume:** 308 L  
**Exterior dimensions in mm:** 1350w x 530d x 835h  
**Number of adjustable shelves:** 6

**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 82/78 kg  
**Energy consumption in 24h:** 2.1 kWh

**\$2,300.00+GST**

# Backbar Display Refrigerators - Swing Door

## Features:



- Double glazed self closing glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external and internal finish
- Frequency/voltage: 50Hz/220-240 V

- Shelf material: perforated stainless steel
- LED internal light
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



UBC630

NEW  
PRODUCT

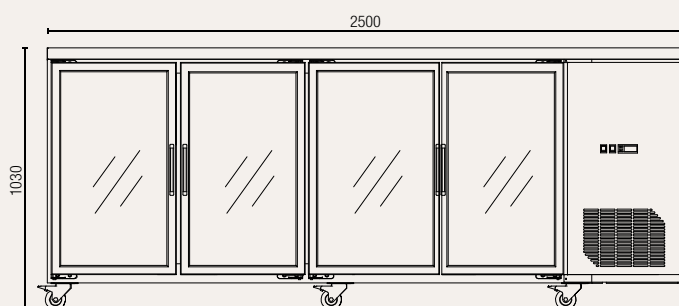

**Gross volume:** 700 L

**Exterior dimensions in mm:** 2500w x 600d x 1030h

**Number of adjustable shelves:** 8

**Temperature set range:** +0°C to +10°C

**Gross/net weight:** 170/140 kg

**Energy consumption in 24h:** 4.1kWh

**\$6,000.00+GST**



# Cake Display Refrigerators



## Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Black stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/230 V
- Ambient temperatures from +16°C to +30°C



## CDR209



**Gross volume:** 300 L

**Exterior dimensions in mm:** 900w x 680d x 1204h

**Number of adjustable shelves:** 2



**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 166/130 kg

**Energy consumption in 24h:** 6.122 kWh

**\$5,300.00+GST**

## CDR212



**Gross volume:** 410 L

**Exterior dimensions in mm:** 1200w x 680d x 1204h

**Number of adjustable shelves:** 2



**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 200/156.5 kg

**Energy consumption in 24h:** 6.829 kWh

**\$6,300.00+GST**

## CDR215



**Gross volume:** 520 L

**Exterior dimensions in mm:** 1500w x 680d x 1204h

**Number of adjustable shelves:** 2

**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 233.5/183 kg

**Energy consumption in 24h:** 8.401 kWh

**\$7,600.00+GST**

# Cake Display Refrigerators



## Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Black stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/230 V
- Ambient temperatures from +16°C to +30°C



## CDR309



**Gross volume:** 390 L

**Exterior dimensions in mm:** 900w x 680d x 1404h

**Number of adjustable shelves:** 3



**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 192/148 kg

**Energy consumption in 24h:** 7.105 kWh

**\$5,600.00+GST**

## CDR312



**Gross volume:** 540 L

**Exterior dimensions in mm:** 1200w x 680d x 1404h

**Number of adjustable shelves:** 3



**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 229.5/180 kg

**Energy consumption in 24h:** 8.374 kWh

**\$6,600.00+GST**

## CDR315



**Gross volume:** 680 L

**Exterior dimensions in mm:** 1500w x 680d x 1404h

**Number of adjustable shelves:** 3

**Temperature set range:** +2°C to +6°C

**Gross/net weight:** 269.5/211 kg

**Energy consumption in 24h:** 10.935 kWh

**\$7,900.00+GST**

# Cake Display Refrigerators

## Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C




## CDS209



available in  
Dark Grey or  
Black

**RUN OUT  
MODEL**  
Limited Stock

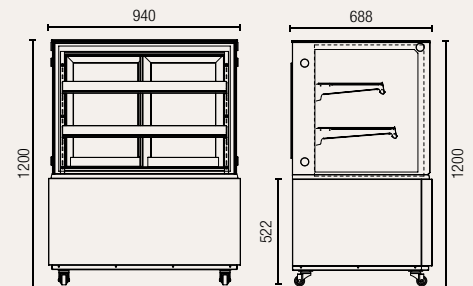

**Gross volume:** 270 L

**Exterior dimensions in mm:** 940w x 688d x 1200h

**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 154/135 kg

**Energy consumption in 24h:** 4.30 kWh


**\$5,000.00+GST**

## CDS212



available in  
Dark Grey or  
Black

**RUN OUT  
MODEL**  
Limited Stock

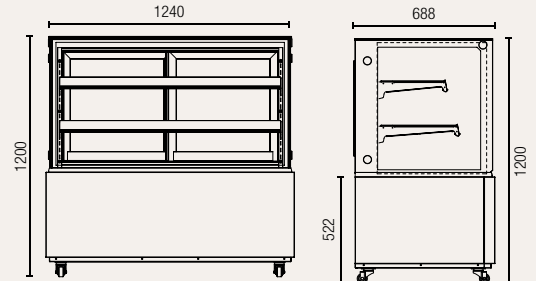

**Gross volume:** 370 L

**Exterior dimensions in mm:** 1240w x 688d x 1200h

**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 188/155 kg

**Energy consumption in 24h:** 5.56 kWh


**\$6,000.00+GST**

## CDS215



available in  
Dark Grey or  
Black

**RUN OUT  
MODEL**  
Limited Stock

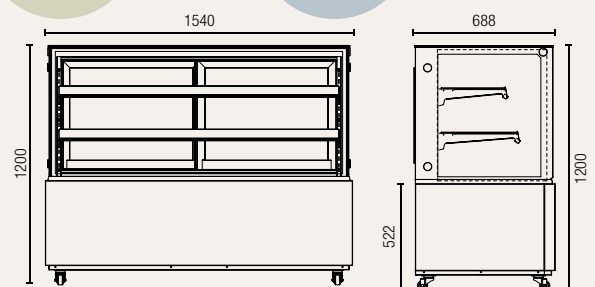

**Gross volume:** 470 L

**Exterior dimensions in mm:** 1540w x 688d x 1200h

**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 230/182 kg

**Energy consumption in 24h:** 5.58 kWh

**\$7,200.00+GST**



# Cake Display Refrigerators

## Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C





**CDS309**



available in  
Dark Grey or  
Black

**RUN OUT  
MODEL**  
Limited Stock



**Gross volume:** 390 L

**Exterior dimensions in mm:** 940w x 688d x 1410h

**Number of adjustable shelves:** 3

**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 190/162 kg

**Energy consumption in 24h:** 4.42 kWh

**\$5,300.00+GST**


# Counter Top Cake Display Refrigerators

**Features:**

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system
- Sliding door for easy access
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- Top LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



## CTC120

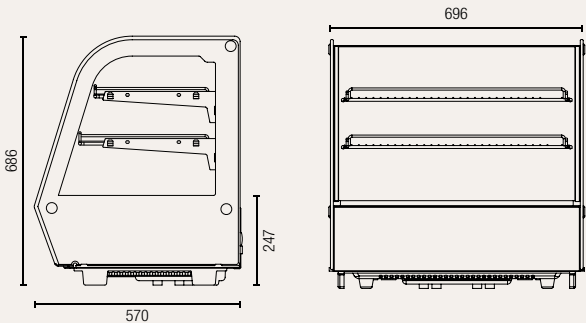


**Gross volume:** 120 L  
**Exterior dimensions in mm:** 710w x 575d x 686h  
**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C  
**Gross/net weight:** 66/64 kg  
**Energy consumption in 24h:** 2.75 kWh

**\$2,000.00+GST**

## CTC160

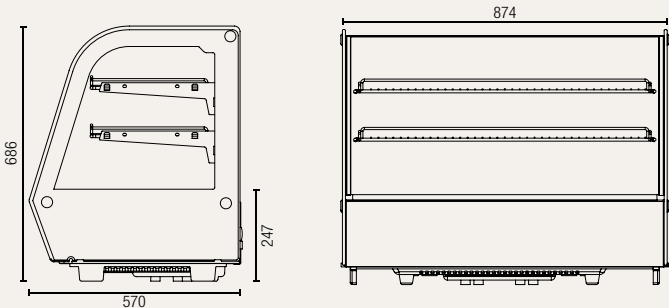

**Gross volume:** 160 L  
**Exterior dimensions in mm:** 890w x 575d x 686h  
**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C  
**Gross/net weight:** 74/71 kg  
**Energy consumption in 24h:** 2.85 kWh

**\$2,200.00+GST**

# Counter Top Cake Display Refrigerators



## Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system
- Sliding door for easy access
- Frequency/voltage: 50Hz/220-240 V

- Shelf material: chrome coated steel
- Top LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



## CTC120S



**Gross volume:** 120 L

**Exterior dimensions in mm:** 702w x 568d x 686h

**Number of adjustable shelves:** 2



**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 60/57 kg

**Energy consumption in 24h:** 2.75 kWh

**\$2,000.00+GST**

## CTC160S



**Gross volume:** 160 L

**Exterior dimensions in mm:** 880w x 568d x 686h

**Number of adjustable shelves:** 2

**Temperature set range:** 0°C to +12°C

**Gross/net weight:** 69/66 kg

**Energy consumption in 24h:** 2.78 kWh

**\$2,200.00+GST**

# Ambient Cake Display

**Features:**

- Atractive design
- Black alluminum frame
- Sliding glass doors with handle
- Easy to assemble

## CD48



**NEW  
PRODUCT**

**Gross Volume:** 48L  
**Dimension in mm:** 920w x 330d x 200h  
**\$520.00+GST**

## CD65



**NEW  
PRODUCT**

**Gross Volume:** 65L  
**Dimension in mm:** 550w x 398d x 381h  
**\$650.00+GST**

## CD68



**NEW  
PRODUCT**

**Gross Volume:** 68L  
**Dimension in mm:** 1200w x 330d x 200h  
**\$670.00+GST**

## CD120



**NEW  
PRODUCT**

**Gross Volume:** 120L  
**Dimension in mm:** 920w x 398d x 381h  
**\$670.00+GST**



# Ambient Cake Display

## Features:

- Attractive design
- Fully assembled
- Easy to clean laminate base
- Rubber feet



- Elegant timber look thick laminate base



- Door hinge designed to hold door open



- Stainless steel look door handle with stopper


## Available in 3 attractive colours:



- Elegant Walnut



- Woodgrain Black



- Natural Oak

## CD35



CD35-O



CD35-W



CD35-B

**RUN OUT  
MODEL**  
Limited Stock



**Gross Volume:** 35L

**Dimension in mm:** 554w x 361d x 305h

- Square glass
- Single tier
- Double opening to the front and back

**\$550.00+GST**

## CD45



CD45-O



CD45-W



CD45-B



**Gross Volume:** 45L

**Dimension in mm:** 554w x 376d x 370h

- Curved glass
- Double tier

**\$660.00+GST**

## CD50



CD50-O



CD50-W



CD50-B



**Gross Volume:** 50L

**Dimension in mm:** 554w x 361d x 370h

- Square glass
- Double tier
- Double opening to the front and back

**\$630.00+GST**



# Display Freezers





# Curved Glass Display Chest Freezers

## Features:

- Analog temperature display and controller
- Static cooling system
- Sliding curved glass doors with lock
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- Powder coated steel exterior dan interior
- 70 mm thick insulation
- Ambient temperatures from +16°C to +38°C



## SD151



**Gross volume:** 151 L

**Exterior dimensions in mm:** 584w x 694d x 850h

**Number of baskets:** 2

**Refrigerant:** R134a

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 55/48 kg

**Energy consumption in 24h:** 1.6 kWh

**\$1,800.00+GST**

## SD400



**Gross volume:** 374 L

**Exterior dimensions in mm:** 1240w x 694d x 850h

**Number of baskets:** 5

**Refrigerant:** R134a

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 82/71 kg

**Energy consumption in 24h:** 2.0 kWh

**\$2,300.00+GST**

## SD575K



**Gross volume:** 575 L

**Exterior dimensions in mm:** 1684w x 694d x 850h

**Number of baskets:** 7

**Refrigerant:** R404a

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 108/90 kg

**Energy consumption in 24h:** 3.7 kWh

**\$3,000.00+GST**

# Flat Glass Display Chest Freezers

## Features:

- Analog temperature display and controller
- Static cooling system
- Sliding flat glass doors with lock
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- Powder coated steel exterior dan interior
- 70 mm thick insulation
- Ambient temperatures from +16°C to +38°C



## SD450



**Gross volume:** 390 L

**Exterior dimensions in mm:** 1314w x 694d x 830h

**Number of baskets:** 4

**Refrigerant:** R134a

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 81/73 kg

**Energy consumption in 24h:** 3.25 kWh

**\$2,300.00+GST**

## SD650



**Gross volume:** 566 L

**Exterior dimensions in mm:** 1799w x 694d x 830h

**Number of baskets:** 6

**Refrigerant:** R404a

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 99/89 kg

**Energy consumption in 24h:** 4.6 kWh

**\$3,200.00+GST**



# Ice Cream Scooping Freezers

## Features:


- Analog temperature display and controller
- Static cooling system
- Sliding curved glass doors with lock
- Rear perspex sliding doors
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- 70 mm thick insulation
- Frequency/voltage: 50Hz/220-240 V
- 5L stainless steel tubs included
- Castor wheels
- Powder coated steel exterior dan interior
- Front light box and internal LED lights
- Mid glass shelf included (not pictured)
- Scoop washer included
- Ambient temperatures from +16°C to +38°C



## SD325S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

**Gross volume:** 325 L

**Exterior dimensions in mm:** 1080w x 838d x 1245h

**Number 5L tubs:** 6

**Rear door storage access:** yes

**Temperature set range:** ≤-18°C

**Gross/net weight:** 138/109 kg

**Energy consumption in 24h:** 2.3 kWh

**Refrigerant:** R134a

**\$5,200.00+GST**

## SD415S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

**Gross volume:** 415 L

**Exterior dimensions in mm:** 1350w x 838d x 1245h

**Number 5L tubs:** 9

**Rear door storage access:** yes

**Temperature set range:** ≤-18°C

**Gross/net weight:** 162/123 kg

**Energy consumption in 24h:** 3.1 kWh

**Refrigerant:** R134a

**\$6,100.00+GST**

## SD575S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

**Gross volume:** 575 L

**Exterior dimensions in mm:** 1720w x 838d x 1245h

**Number 5L tubs:** 12

**Rear door storage access:** yes

**Temperature set range:** ≤-18°C

**Gross/net weight:** 199/152 kg

**Energy consumption in 24h:** 4.5 kWh

**Refrigerant:** R404a

**\$7,000.00+GST**

# Gelato Freezers

## Features:


- Digital temperature display and electronic controller
- Dynamic cooling system with auto defrosting
- Sliding flat glass doors
- Frequency/voltage: 50Hz/220-240 V

- Refrigerant: R290
- Castor wheels
- 60 mm thick insulation
- Ambient temperatures from +16°C to +32°C



IC16T

NEW  
PRODUCT

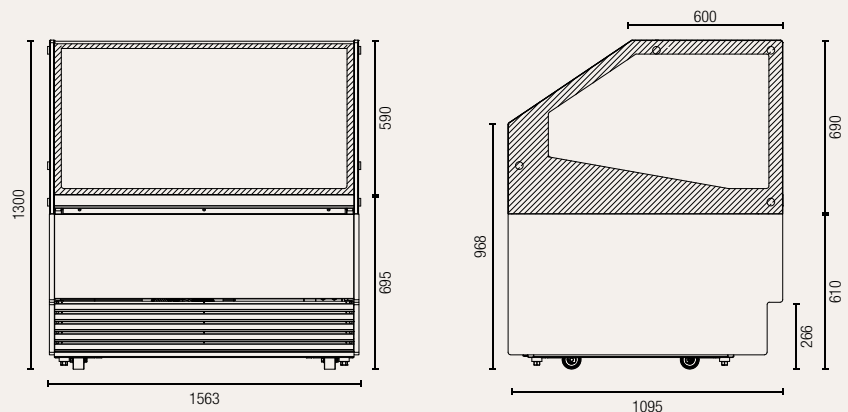

**Gross volume:** 754 L

**Exterior dimensions in mm:** 1563w x 1095d x 1300h

**Number 5L tubs hold:** 16 (tubs not included)

**Temperature set range:** -16°C -18°C

**Gross/net weight:** 397/302 kg

**Energy consumption in 24h:** 27.4 kWh

**\$16,000.00+GST**

# Supermarket Island Freezers

## Features:

- Digital temperature display and controller
- Static cooling system
- Auto defrosting system
- Sliding curved glass doors
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- LED internal light
- Powder coated steel exterior dan interior
- 80 mm thick insulation
- Drain tube integrated



**HR-21H**



**RUN OUT  
MODEL**  
Limited Stock

**Gross volume:** 826 L

**Exterior dimensions in mm:** 2105 x 816d x 850h

**Number of baskets:** 8

**Temperature set range:**  $\leq -18^{\circ}\text{C}$

**Gross/net weight:** 135/120 kg

**Nominal power consumption:** 6 W

**\$7,900.00+GST**



# Vaccine Refrigerators





# Vaccine Refrigerators

## Features:

- Digital controller with digital temperature display
- Temperature data logger included
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V

- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



## MV30





Temperature data logger included



Battery backup for controller in case of power outage



Quality Care Pharmacy Program  
An initiative of The Pharmacy Guild of Australia



**Gross/Net volume:** 30/29 L

**Exterior dimensions in mm:** 445w x 485d x 535h

**Number of shelves:** 3

**Max. noise level:** 50 dB

**Temperature range:** +2°C to +8°C

**Gross/net weight:** 29/27 kg

**Energy consumption in 24h:** 0.8 kWh

**\$2,000.00+GST**

## MV60





Temperature data logger included



Battery backup for controller in case of power outage



Quality Care Pharmacy Program  
An initiative of The Pharmacy Guild of Australia



**Gross/Net volume:** 62/59 L

**Exterior dimensions in mm:** 445w x 485d x 725h

**Number of shelves:** 4

**Max. noise level:** 50 dB

**Temperature range:** +2°C to +8°C

**Gross/net weight:** 33/31 kg

**Energy consumption in 24h:** 0.8 kWh

**\$2,200.00+GST**

## MV150





Temperature data logger included



Battery backup for controller in case of power outage



Quality Care Pharmacy Program  
An initiative of The Pharmacy Guild of Australia



**Gross/Net volume:** 148/145 L

**Exterior dimensions in mm:** 595w x 595d x 820h

**Number of shelves:** 4

**Max. noise level:** 50 dB

**Temperature range:** +2°C to +8°C

**Gross/net weight:** 45/42 kg

**Energy consumption in 24h:** 1.35 kWh

**\$2,800.00+GST**

# Vaccine Refrigerators

## Features:

- Digital controller with digital temperature display
- Temperature data logger included
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V

- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



## MV300




Temperature data logger included



Battery backup for controller in case of power outage



Quality Care Pharmacy Program  
An initiative of The Pharmacy Guild of Australia

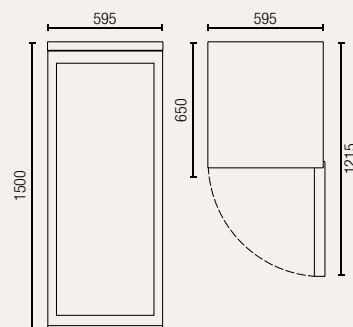

**Gross/Net volume:** 308/300 L

**Exterior dimensions in mm:** 595w x 650d x 1500h

**Number of shelves:** 8

**Max. noise level:** 55 dB

**Temperature range:** +2°C to +8°C

**Gross/net weight:** 78/72 kg

**Energy consumption in 24h:** 2.9 kWh

**\$4,000.00+GST**

## MV400




Temperature data logger included



Battery backup for controller in case of power outage



Quality Care Pharmacy Program  
An initiative of The Pharmacy Guild of Australia

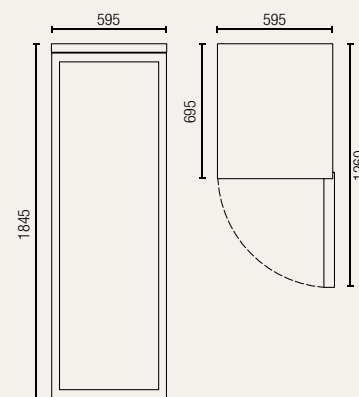

**Gross/Net volume:** 408/400 L

**Exterior dimensions in mm:** 595w x 695d x 1845h

**Number of shelves:** 8

**Max. noise level:** 65 dB

**Temperature range:** +2°C to +8°C

**Gross/net weight:** 92/84 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,500.00+GST**

# Warranty Against Defects

Exquisite Marketing Australia Pty. Ltd. (A.C.N. 108 843 054) of Unit 5, 6 Garden Road, Clayton VIC 3168 Australia (Phone: (03) 9561 1595; Email: sales@exquisiteast.com.au) ("Exquisite") warrants to the original purchaser ("Customer") who has purchased any of its following products ("Product") that they will be free from defects in workmanship and material for their respective periods as set out below from and including the date of invoice ("Warranty Period"). It is, however, expressly agreed that to the extent permitted by law, Exquisite is not liable for any indirect or consequential loss, loss of profit or any other economic loss arising from any defects covered by the Warranty. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

**Exquisite Underbench Storage Refrigerators and Freezers** - Thirty six (36) months\* for materials and workmanship  
**Exquisite Single Door Underbench Storage Refrigerators and Freezers - MC210H, MC210G, MF210H and MF210G** - Twenty four (24) months for materials and workmanship  
**Exquisite Single Door Underbench Storage Refrigerators and Freezers - MC200H and MC200G** - Twelve (12) months for materials and workmanship  
**Exquisite Upright Storage Refrigerators and Freezers** - Thirty six (36) months\* for materials and workmanship  
**Exquisite Food Preparation Refrigerators** - Thirty six (36) months\* for materials and workmanship  
**Exquisite Counter Top Food Preparation Refrigerators** - Twenty four (24) months for materials and workmanship  
**Exquisite Storage Chest Freezers - Stainless Steel Top** - Twenty four (24) months for materials and workmanship  
**Exquisite Counter Top Display Refrigerators - CTD78** - Twenty four (24) months for materials and workmanship  
**Exquisite Upright Display Refrigerators** - Twenty four (24) months for materials and workmanship  
**Exquisite Supermarket Display Chillers - SMC1600** - Twenty four (24) months for materials and workmanship  
**Exquisite Backbar Refrigerators** - Twenty four (24) months for materials and workmanship  
**Exquisite Cake Display Refrigerators - CDR309, CDR312, CDR315, CDR209, CDR212 and CDR215** - Twenty four (24) months for materials and workmanship  
**Exquisite Cake Display Refrigerators - CDS309, CDR209, CDS212 and CDS215** - Twelve (12) months for materials and workmanship  
**Exquisite Counter Top Cake Display Refrigerators** - Twenty four (24) months for materials and workmanship  
**Exquisite Curved Glass Display Chest Freezers** - Twenty four (24) months for materials and workmanship  
**Exquisite Flat Glass Display Chest Freezers** - Twenty four (24) months for materials and workmanship  
**Exquisite Ice Cream Scooping Freezers** - Twenty four (24) months for materials and workmanship  
**Exquisite Gelato Freezers** - Twenty four (24) months for materials and workmanship  
**Exquisite Supermarket Island Freezers** - Twelve (12) months for materials and workmanship  
**Exquisite Vaccine Refrigerators** - Twenty four (24) months for materials and workmanship

Should the Customer find any defect in material or workmanship within the Warranty Period, Exquisite will at its sole discretion either replace the Product or repair the Product at no cost subject to the following terms and conditions ("Warranty").

1. The Warranty applies if and only if the Customer has used the Product in accordance with the directions given by Exquisite and strictly for the purpose to which the Product is intended.
2. The Warranty Period begins on the original date of purchase (being the date stated on Exquisite's invoice or the invoice of Exquisite's authorised dealer ("Invoice").
3. The Warranty is valid only for Products originally purchased and used within Australia.
4. The Customer must provide to Exquisite details of the Invoice (including serial number and model code) when making a claim under the Warranty. Incorrect or incomplete details may delay the processing of the claim. Exquisite reserves the right to charge the Customer for all reasonable expenses if the information provided by the Customer is incorrect or the Product was in fact not originally purchased by the Customer directly from Exquisite.
5. Exquisite or its authorised agent has the right to assess the Product to determine the cause of the defect. The Customer must make the Product accessible for Exquisite or its authorised agent to assess and, if applicable, to repair including removing all personal items in the way. If required, the Customer must at the Customer's own cost (unless otherwise prescribed by law) return the Product to Exquisite or its authorised agent. The Product must be returned with all original components including but not limited to manual, keys and bracket.
6. The Warranty does not apply:
  - If notice of the defect has not been given by the Customer within the Warranty Period; or
  - If the defect arises from or in the reasonable opinion of Exquisite or its authorised agent, is likely to arise from one or more of the following:
    - connection to improper, inadequate or faulty electricity;
    - damage or failure as a consequence of not removing the packaging or transportation material before use;
    - natural wear and tear including but not limited to filters, fuses, lamps, batteries, handles, locks, hinges, glass or plastic components and liquid containing components;
    - extraordinary or unforeseeable events including but not limited to voltage/power surges, irregular electric power supply, natural events or disasters such as flooding and earthquake, riots and sabotage;
    - improper use of cleaning agents, detergents, bleaches or other chemical additives or agents of a corrosive nature;
    - breakage, either intentionally or accidentally, to any part of the Product;
    - any modification to, tampering with or repair or servicing of the Product except by Exquisite or its authorised agent or using parts not approved or authorised by Exquisite;
    - improper, reckless, negligent or unsuitable use of the Product including but not limited to: (a) use for an unspecified purpose; (b) use in an environment where the ambient temperature and relative humidity are outside the operating parameters specified for the Product; (c) movement of the Product when in operation (for clarity, the Products are designed for stationary operation only and must be connected directly to fixed wall power supply); (d) improper adjustment made such as to the analogue thermostat or digital controller when the Product is in operation;
    - corrosion or damage caused by foreign object externally or internally;
    - engine, mechanical or technical failure (but not limited to compressor failure) due to one or more of the following:
      - inadequate and/or irregular maintenance (of the type specified or recommended by its manufacturer/Exquisite) of components including but not limited to condensers and filters;
      - inadequate and/or irregular cleaning of the condenser (fortnightly and more frequently if required);
      - failure to provide adequate ventilation for the Product as specified or recommended by its manufacturer/Exquisite;
      - fair wear and tear.
7. Any repair must be undertaken either by Exquisite or an agent authorised by Exquisite. Otherwise, Exquisite is entitled to avoid the Warranty.
8. The Warranty Period is not extended or renewed by any successful claim whereby the Product is replaced or repaired.
9. Exquisite makes no representation as to the time frame within which any repair can or will be carried out. In general, any repair will be restricted to normal business hours Monday to Friday (9am - 5pm) excluding public holidays and weekends. Exquisite is not liable for the cost of the authorised service agents other than the time specified in this point. Exquisite is not liable for travelling time of more than 50 kilometres from an authorised service agent or 1 hour from the service agent, whichever is lesser. For goods located outside this area, it is the customer responsibility and cost to transport goods forth and back. When the customer is not able to transport the goods, the customer shall be responsible to pay upfront payment for Exquisite to arrange the transportation of the goods, AND / OR to any necessary travelling expenses for Exquisite service agents to attend the service.
10. Where Exquisite elects to replace rather than repair a Product but no identical replacement is available, Exquisite has the right to replace the Product with one of a similar standard and design then available from its range. Exquisite is not responsible for the re-packing and installation of any replacement.
11. Exquisite has the rights to invoice a customer directly for a service call, parts, and labour, for a service that was deemed by its authorised service agents for issues not connected to a warranty issue. The invoice is required to be paid within 14 days of the invoice date.

\*Applied to selected products purchased from March 2024 onward unless otherwise indicated

# Exquisite

Exquisite Marketing Australia Pty. Ltd.  
Unit 5, 6 Garden Road  
Clayton VIC 3168 Australia

**P** +61 3 9561 1595, 9561 1695

**F** +61 3 9561 1690

**E** [sales@exquisiteaust.com.au](mailto:sales@exquisiteaust.com.au)

**[WWW.EXQUISITEAUST.COM.AU](http://WWW.EXQUISITEAUST.COM.AU)**

All specifications are subject to change without prior notice. Printed in 2024

